



Simba SDK

Build a C++ ODBC Driver in 5 Days (Linux/Unix)

Version 10.3

August 2024

Copyright

This document was released in August 2024.

Copyright ©2014–2024 insightsoftware. All rights reserved.

No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without prior written permission from insightsoftware.

The information in this document is subject to change without notice. insightsoftware strives to keep this information accurate but does not warrant that this document is error-free.

Any insightsoftware product described herein is licensed exclusively subject to the conditions set forth in your insightsoftware license agreement.

Simba, the Simba logo, SimbaEngine, and Simba Technologies are registered trademarks of Simba Technologies Inc. in Canada, the United States and/or other countries. All other trademarks and/or servicemarks are the property of their respective owners.

All other company and product names mentioned herein are used for identification purposes only and may be trademarks or registered trademarks of their respective owners.

Information about the third-party products is contained in a third-party-licenses.txt file that is packaged with the software.

Contact Us

insightsoftware

www.insightsoftware.com

Table of Contents

Copyright	2
Table of Contents	3
Introduction	5
About SimbaEngine	5
About the Quickstart Sample Driver	5
Overview	7
Day One – Linux Instructions	8
Installing SimbaEngine	8
Building the Quickstart Sample Driver	8
Configuring the Driver and Data Source	9
Connecting to the Data Source	12
Setting Up a Customizable Project	13
Configuring Your Driver and Data Source	14
Connecting to the Data Source Using Your Customizable Driver	14
Summary – Day One	15
Day Two	16
Construct a Connector Singleton	16
Setting Driver Properties	17
Setting Logging Details	17
Checking Connection Settings	18
Establishing a Connection	18
Day Three	20

Creating and Return Metadata Sources	20
Day Four	22
Enabling Data Retrieval	22
Day Five	25
Configuring Error Messages	25
Adding Finishing Touches	25
Reference	27
Appendix A: ODBC Data Source Administrator on Windows 32-Bit vs. 64-Bit	27
Appendix B: Bitness and the Windows Registry	27
Appendix C: Data Retrieval	29
More information on Date, Time and DateTime types	31
Simple Fixed-Length Data Example	31
Simple Variable-Length Data Example	31
Appendix D: C++ Server Configuration	33
Appendix E: C++ Server Configuration	33
Third Party Licenses	35

Introduction

The Build a C++ ODBC Driver in 5 Days guide demonstrates how to create a custom ODBC driver using SimbaEngine. Procedures in the guide explain how to modify and customize the Quickstart sample driver included with SimbaEngine.

At the end of five days, you will have a read-only driver that connects to your data store.

About SimbaEngine

ODBC is one of the most established and widely supported APIs for connecting to and working with databases. The ODBC specification provides a standard interface to which any ODBC-enabled application can connect. At the heart of ODBC technology is the driver, which connects an application to a data store.

SimbaEngine is a complete implementation of the ODBC specification. The libraries of SimbaEngine hide the complexity of error checking, session management, data conversions and other low-level implementation details, exposing a simple API called the Data Store Interface API (DSI API) that defines the operations needed to access a data store.

You use SimbaEngine to create an executable file that common reporting applications access when connecting to your data store in the process of executing an SQL statement. The executable file can be a Windows DLL; a Linux, Unix or Mac OS X shared object; a stand-alone server; or, some other form of executable. First, you create a DSI implementation (DSII) customized as needed to connect to your data source. Then, you create the executable by linking libraries from SimbaEngine with your custom DSI implementation. The project files or make files link in the appropriate SimbaODBC and SimbaEngine libraries to complete the driver. In the final executable, the components from SimbaEngine take responsibility for meeting the data access standards while your custom DSI implementation takes responsibility for accessing your data store and translating it to the DSI API.

Note: For a brief description of the ODBC standard, see <http://www.simba.com/resources/data-access-standards-library#!odbc>. For complete information on the ODBC 3.80 specification, see the ODBC Programmer's Reference at [http://msdn.microsoft.com/en-us/library/ms714177\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/ms714177(v=vs.85).aspx). For full documentation on SimbaEngine, see <http://www.simba.com/products/simba-engine-sdk>.

About the Quickstart Sample Driver

SimbaEngine includes sample drivers that you can use as a starting point for customizing your own driver. The Quickstart driver is a sample DSI implementation of an ODBC driver written in C++ that reads files in tabbed Unicode text format. The Simba SQLEngine component is required to perform the necessary SQL processing in the implementation because text files are not a SQL-aware data source.

Using the Quickstart sample driver to prototype a DSI implementation for your own data store helps you learn how SimbaEngine works. If you remove the shortcuts and simplifications implemented in the Quickstart driver, you can also use the driver as the

foundation for a commercial DSI implementation. Using the Quickstart sample driver is a fast and effective way to prepare a data access solution for your customers.

The UML diagram in "About the Quickstart Sample Driver" on the previous page shows a typical design pattern for a DSI implementation.

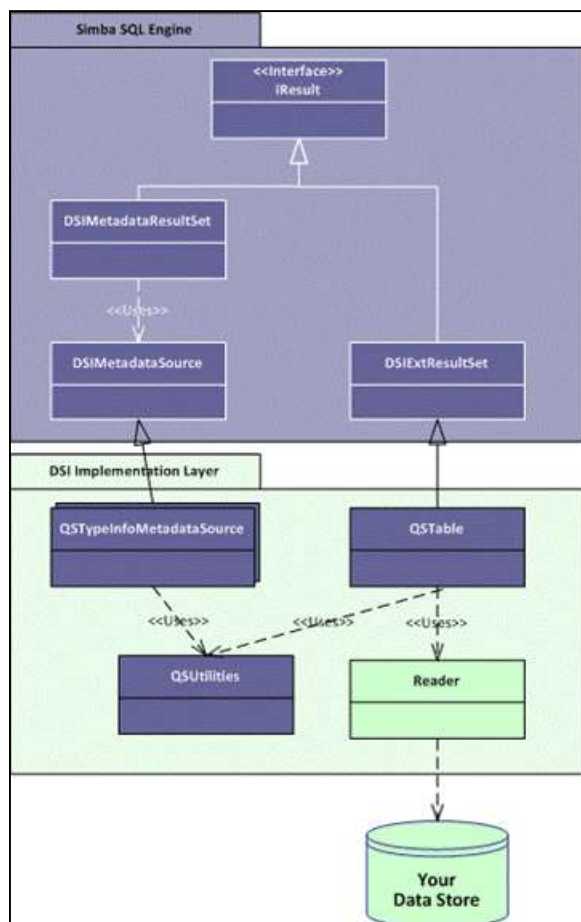


Figure 1: Design Pattern for a DSI Implementation

Notice the circular pattern of class relationships, headed by `iResult` and anchored by `QSUtilities`. The `iResult` class is responsible for retrieving column data and maintaining a cursor across result rows. The `QSUtilities` class contains platform-specific utility functions.

To implement data retrieval, your Reader class interacts directly with your data store to retrieve data, and then deliver the data to the QSTable class on demand. The Reader class should manage caching, buffering, paging and all the other techniques to speed data access.

As a starting point, to make your driver work properly with Microsoft Excel you can add metadata access by implementing the `QTypeInfoMetadataSource` class and using the `DSIExtMetadataHelper` class. The `DSIExtMetadataHelper` class is responsible for iterating through tables and stored procedures so the engine can generate catalog function metadata.

Overview

To implement a working DSI with your data store, you need to:

1. Set up the development environment
2. Make a connection to the data store
3. Retrieve metadata
4. Work with columns
5. Retrieve data

In the Quickstart sample driver, you can identify areas of the code requiring modification by referring to pragma messages containing sequentially numbered TODO labels and a brief description.

Some areas of code you need to modify relate to retrieving data and metadata from your data store into the Simba SQLEngine. The Quickstart sample driver includes the classes and code to access the example data store. You need to modify the sample code to access your data store.

Some modifications you may make to Quickstart sample driver code relate to productization, including:

- Naming the driver
- Setting configuration properties for the driver
- Naming the XML error file and log files

Day One – Linux Instructions

Today's tasks help you set up and test your development environment for building and testing ODBC drivers using SimbaEngine.

Installing SimbaEngine

On Linux and UNIX platforms, SimbaEngine is provided as a single file consisting of the `SimbaEngineSDK*.tar.gz` file, a tar format archive that has been compressed using the `gzip` tool. The asterisk (*) in the file name represents a string of characters that represent the build number and platform. For example, the file name might look something like this: `SimbaEngineSDK_Release_Linux-x86_0.1000.tar.gz`

If you have a previous version of SimbaEngine installed, then uninstall the previous version prior to installing the new version.

To install SimbaEngine:

1. Open a command prompt.
2. Navigate to the directory where you want to install SimbaEngine.

In the *Build a C++ ODBC Driver in 5 Days* guide, the directory where you install SimbaEngine is referred to using the placeholder `<installdir>`. When working through procedures, ensure that you replace `<installdir>` using the appropriate file path.

3. Copy the `SimbaEngineSDK*.tar.gz` file to the directory where you want to install SimbaEngine.
4. To uncompress the file, type `gunzip SimbaEngineSDK*.tar.gz` at the command line.
5. To extract the tar file, type `tar -xvf SimbaEngineSDK*.tar`.

Building the Quickstart Sample Driver

On Linux and UNIX platforms, the sample drivers include makefiles instead of Visual Studio solution files. After you install SimbaEngine, sample drivers appear in the folder `<installdir>/SimbaEngineSDK//Examples`. The process for building each sample driver is similar on Linux and UNIX platforms.

The process for building sample drivers is the exact process depends on whether you are using 32-bit or 64-bit Linux.

To determine the version of Linux you are using:

At the command line, type `uname -m`.

To build the SimbaEngine Quickstart sample driver:

1. Set the `SIMBAENGINE_DIR` environment variable by typing: `export SIMBAENGINE_DIR=<installdir>/SimbaEngineSDK//DataAccessComponents`.

In the command above, replace `<installdir>` with the directory where you installed the SimbaEngine files.

2. Set the `SIMBAENGINE_THIRDPARTY_DIR` environment variable by typing:

```
export SIMBAENGINE_THIRDPARTY_DIR=<installdir>/SimbaEngineSDK//
DataAccessComponents/ThirdParty.
```

3. Change to the following directory:

```
<installdir>/SimbaEngineSDK//Examples/Builds/Makefiles.
```

4. Type `make -f Quickstart.mak debug` to run the makefile for the debug target. Note that, optionally, other options can be specified on the command line. For more information about the options and build configurations, refer to the *SimbaEngine Developer Guide*.

Configuring the Driver and Data Source

SimbaEngine supports using the iODBC or unixODBC Driver Managers on Linux platforms. iODBC and unixODBC use configuration files to define and configure ODBC data sources and drivers. The `odbc.ini` file is used to define ODBC data sources and the `odbcinst.ini` file is used to define ODBC drivers.

Locating ODBC Configuration Files

The value of the `$ODBCINI` environment variable specifies the location of the `odbc.ini` file, including the file name, for iODBC and unixODBC. The value of the `$ODBCINSTINI` environment variable specifies the location of the `odbcinst.ini` file, including the file name, for iODBC. The value of the `$ODBCSYSINI` environment variable specifies the directory containing the `odbcinst.ini` file for unixODBC. If the environment variables are not set, then the driver manager assumes that the configuration files exist in the user's home directory using the default file names (`.odbc.ini` and `.odbcinst.ini`).

Optionally, if you decide to put the configuration files somewhere other than the user's home directory, then set the environment variables using the command line. For example:

```
export ODBCINI=/usr/local/odbc/myodbc.ini
export ODBCINSTINI=/usr/local/odbc/myodbcinst.ini
export ODBCSYSINI=/usr/local/odbc
```

Samples of the configuration files are provided in the following directory:

```
<installdir>/SimbaEngineSDK//Documentation/Setup .
```

Configuring an ODBC Data Source

ODBC Data Sources are defined in the `.odbc.ini` configuration file.

To configure a data source:

1. To see if the `.odbc.ini` file already exists in your home directory, type the following command:

```
ls -al ~ | grep .odbc.ini
```

If the file exists, you will see something like this:

```
-rw-rw-r-- 1 employee employee 1379 Oct 23 14:56 .odbc.ini
```

If the file doesn't exist, then the command will not return anything. In this case, copy the `odbc.ini` file from the samples directory by typing:

```
cp <installdir>/SimbaEngineSDK//Documentation/Setup/odbc.ini ~/.odbc.ini
```

2. Open the `~/.odbc.ini` configuration file in a text editor. To open the file, you may need to configure your text editor to show hidden files.
3. Make sure there is an entry in the [ODBC Data Sources] section that defines the data source name (DSN). The [ODBC Data Sources] section is used to specify the available data sources.

```
[ODBC Data Sources]
QuickstartDSII=QuickstartDSIIDriver
```

4. Make sure there is a section with a name that matches the data source name (DSN). This section will contain the configuration options. They are specified as key-value pairs.

```
[QuickstartDSII]
Description=Sample 32-bit SimbaEngine Quickstart DSII
DBF=<installdir>/SimbaEngineSDK//Examples/Databases/Quickstart/
Driver=<installdir>/SimbaEngineSDK//Examples/Builds/Bin/ Linux_x86/libQuickstart_
debug.so
```

For 64-bit Linux, it might look something like this:

```
[QuickstartDSII]
Description=Sample 64-bit SimbaEngine Quickstart DSII
DBF=<installdir>/SimbaEngineSDK//Examples/Databases/Quickstart/
Driver=<installdir>/SimbaEngineSDK//Examples/Builds/Bin/ Linux_x86_64/libQuickstart_
debug.so
```

Defining an ODBC Driver

ODBC Drivers are defined in the `.odbcinst.ini` configuration file. This configuration is optional because drivers can be specified directly in the `.odbc.ini` configuration file as discussed in the previous section.

To define a driver:

1. To see if the `.odbcinst.ini` file exists in your home directory, type the following command:

```
ls -al ~ | grep .odbcinst.ini
```

If the file exists, you will see something like this:

```
-rw-rw-r-- 1 employee employee 2272 Oct 23 15:30 .odbcinst.ini
```

If the file doesn't exist, then the command will not return anything. In this case, copy the `odbc.ini` file from the samples directory by typing:

```
cp <installdir>/SimbaEngineSDK//Documentation/Setup/odbcinst.ini
~/.odbcinst.ini
```

2. Open the `~/.odbcinst.ini` configuration file in a text editor.
3. Add a new entry to the [ODBC Drivers] section. The [ODBC Drivers] section is used to specify the available drivers. Type driver name and the value "Installed". This driver name should be used for the "Driver" value in the data source definition instead of the driver shared library name. For example, it might look something like this:

```
[ODBC Drivers]
QuickstartDSIIDriver=Installed
```

4. Add a new section with a name that matches the new driver name. This section will contain the configuration options. They are specified as key-value pairs.

For 32-bit Linux, it might look something like this:

```
[QuickstartDSIIDriver]
Driver=<installdir>/SimbaEngineSDK//Examples/Builds/Bin/ Linux_x86/libQuickstart_
debug.so
```

For 64-bit Linux, it might look something like this:

```
[QuickstartDSIIDriver]
Driver=<installdir>/SimbaEngineSDK//Examples/Builds/Bin/ Linux_x8664/libQuickstart-
debug.so
```

Configuring the Simba Quickstart Sample Driver

Configuration options for drivers created using SimbaEngine appear in an .INI file. In order, SimbaEngine searches for the .INI file in the following locations:

1. The path, including the file name, specified using the SIMBAINI environment variable.
2. The driver directory, as a non-hidden .INI file.
3. In \$HOME, as a hidden .INI file.
4. In /etc/ as a non-hidden .INI file.

Procedures in *the Build a C++ ODBC Driver in 5 Days* guide assume that the .INI file exists in the user's home directory.

To configure the Simba Quickstart ODBC Driver:

1. To see if the .simba.quickstart.ini file already exists in your home directory, type the following command:

```
ls -al ~ | grep .simba.quickstart.ini
```
2. If the file doesn't exist, then the command will not return anything. In this case, copy the file from the samples directory by typing:

```
cp
<installdir>/SimbaEngineSDK//Documentation/Setup/.simba.quickstart.ini
~/.simba.quickstart.ini
```
3. Open the ~/.simba.quickstart.ini configuration file in a text editor.
4. Edit the DriverManagerEncoding setting.
 If you are using the "iODBC" ODBC Driver Manager set the DriverManagerEncoding setting to UTF-32.
 -or-
 If you are using the "unixODBC" ODBC Driver Manager, you will need to check which setting to use. Type `odbc_config --cflags` at a command prompt. If you see the "DSQL_WCHART_CONVERT" flag, then set the DriverManagerEncoding setting to UTF-32. Otherwise, set it to UTF-16.
 For more information about your ODBC driver manager, consult your system

administrator or your ODBC Driver Manager documentation.

5. Edit the ErrorMessagePath setting to replace [INSTALLDIR] with your install directory.
6. Set the ODBCInstLib to the absolute path of the ODBCInst library for the Driver Manager that you are using.
For example, for the iODBC Driver Manager this would look something like this:
ODBCInstLib=<driver manager dir>/lib/libiodbcinst.so (notice the 'i' after the lib)
For unixODBC this would be:
ODBCInstLib=<driver manager dir>/lib/libodbcinst.so
7. Save the file.

For more information about how to configure data sources under Linux, Unix and MacOSX, please refer to the SimbaEngine Developer Guide.

Connecting to the Data Source

In order for the Quickstart sample driver to connect to the sample database successfully, the LD_LIBRARY_PATH environment variable must include references to the following libraries:

- International Components for Unicode (ICU)
- OpenSSL

To add the 32-bit ICU and OpenSSL libraries:

- Type the following at the command line:

```
export LD_LIBRARY_PATH=$LD_LIBRARY_PATH:[INSTALLDIR]/SimbaEngineSDK/
/DataAccessComponents/ThirdParty/icu/53.1/centos5/gcc4_
4/release32/lib:
[INSTALLDIR]/SimbaEngineSDK//DataAccessComponents/ThirdParty/openssl
/1.0.1/centos5/gcc4_4/release32/lib
```

To add the 64-bit ICU and OpenSSL libraries:

- Type the following at the command line:

```
export LD_LIBRARY_PATH=$LD_LIBRARY_PATH:[INSTALLDIR]/SimbaEngineSDK/
/DataAccessComponents/ThirdParty/icu/53.1/centos5/gcc4_4/release64/lib:
[INSTALLDIR]/SimbaEngineSDK//DataAccessComponents/ThirdParty/openssl/1.0.1/
centos5/gcc4_4/release64/lib
```

Also, you must have a driver manager such as iODBC or unixODBC installed.

For more details on driver managers and testing, refer to the SimbaEngine Developer Guide.

The following procedure uses the iodbctest utility included with the iODBC driver manager to test connecting to the data source that the Quickstart sample driver uses.

To test connecting the Quickstart sample driver to the sample data source:

1. At the command prompt, type: `iodbctest`
2. At the prompt that says "Enter ODBC connect string", type ? to show the list of DSNs and Drivers.
3. In the list, you should see your QuickstartDSII DSN.
4. To connect to your data source, type: `DSN=QuickstartDSII`
A prompt that says "SQL>" appears.
5. Type a SQL command to query your database. For example, `SELECT * FROM PRODUCT.`

If there were no problems with the example drivers you built, you are now ready to set up a development project based on the Quickstart sample driver project that you can customize to develop your own ODBC driver.

Setting Up a Customizable Project

Now you are ready to set up a separate project for customization based on the Quickstart sample driver.



Important: Creating a separate project to customize is helpful because you can compare your project to the Quickstart sample driver when debugging, for example.

To create a customizable project based on the Quickstart sample driver:

1. Copy the Quickstart directory to a new directory that will be the top-level directory for your new project and DSI implementation files. For example, at the command line type:

```
cp -R <installdir>/SimbaEngineSDK//Examples/Source/Quickstart  
<installdir>/SimbaEngineSDK//Examples/Source/MyQuickstart
```
2. Browse to the /Makefiles subdirectory in the copy of the Quickstart project that you created in step "Setting Up a Customizable Project" above, and then rename the `Quickstart.mak` file. For example, type:

```
mv Quickstart.mak MyQuickstart.mak
```
3. Then, rename the `.depend` file that is located in the `Makedepend` directory.
4. Browse to the /Source subdirectory in the copy of the Quickstart project that you created in step "Setting Up a Customizable Project" above. Open the file named `Makefile`, and then replace the "Quickstart" project name in the source code with the name of your new ODBC driver. Save and close the file.
5. Navigate to the following directory:

```
<installdir>/SimbaEngineSDK//Examples/Source/MyQuickstart/Makefiles
```
6. Type `make -f MyQuickstart.mak debug` to run the makefile for the debug target.

Configuring Your Driver and Data Source

To configure your driver and data source:

1. Open the `.odbc.ini` configuration file in a text editor.
2. Make sure there is an entry in the [ODBC Data Sources] section that defines the data source name (DSN).

[ODBC Data Sources]

MyQuickstartDSII=MyQuickstartDSIIDriver

3. Make sure there is a section with a name that matches the data source name (DSN). For example:

[MyQuickstartDSII]

Description=Sample SimbaEngine Quickstart DSII

DBF=[INSTALLDIR]SimbaEngineSDK//Examples/Databases/Quickstart/

Driver=[INSTALLDIR]SimbaEngineSDK//Examples/Source/MyQuickstart/Bin/Darwin_universal_clang/libMyQuickstart_debug.dylib

Locale=en-US

4. Open the `.odbcinst.ini` configuration file in a text editor.
5. Add a new entry to the [ODBC Drivers] section. For example:

[ODBC Drivers]

MyQuickstartDSIIDriver=Installed

6. Add a new section with a name that matches the new driver name. For example:

[MyQuickstartDSIIDriver]

Driver=[INSTALLDIR]SimbaEngineSDK//Examples/Source/MyQuickstart/Bin/Darwin_universal_clang/libMyQuickstart_debug.dylib

7. Copy the `.simba.quickstart.ini` file in your home directory so it has the name `.simba.myquickstart.ini`

Connecting to the Data Source Using Your Customizable Driver

To test connecting your customizable driver to the Quickstart sample data source using `iodbctest`:

1. At the command prompt, type: `iodbctest`.
2. At the prompt that says "Enter ODBC connect string", type `?` to show the list of DSNs and Drivers.
3. In the list, you should see your MyQuickstartDSII DSN.
4. To connect to your data source, type: `DSN=MyQuickstartDSII`. A prompt that says "SQL>" appears.

5. Type a SQL command to query your database. For example, `SELECT * FROM PRODUCT.`
6. To quit `iodbctest`, at the prompt, type `quit`.

You can also use a debugger, such as `gdb`, with the `iodbctest` utility.

To use `gdb` test your driver and hit a breakpoint:

1. To start the debugger, type `gdb iodbctest`.
2. Type `break Simba::DSI::DSIDriverFactory`
This will set a breakpoint at the `DSIDriverFactory()` function at line 31 in the `MainUnix.cpp` file. This is a good breakpoint to start with because this function runs as soon as the Driver Manager loads the ODBC driver. If you would rather set a different breakpoint, you can view the source code in this directory:
`<installdir>/SimbaEngineSDK/Examples/Source/MyQuickstart/Source`
3. Type `run DSN=MyQuickstartDSII`
The program runs until the breakpoint is encountered.

When using the `gdb` debugger with an application, your ODBC driver is not loaded until the application is running and you make a connection. This means that you can set breakpoints before it is loaded or after, depending on which breakpoint you want to hit.

Summary – Day One

So far, the following tasks are complete:

- Building and testing the Quickstart sample driver to ensure that your SimbaEngine and development environment are installed and configured correctly
- Creating, building and testing a copy of the Quickstart sample driver that you can customize to connect to a different data source

Day Two

Today's goal is to customize your driver, enable logging and establish a connection to your data store. To accomplish this you will visit TODO items 1 to 6.

Remember that when you build the project, you will see the TODO messages in the Output window. To rebuild the whole solution, select **Build > Rebuild Solution**. If the Output window is not open, then select **Debug > Windows > Output**. Double click a TODO message to jump to the relevant section of code.

Construct a Connector Singleton

TODO #1: Construct a Connector Singleton

The `DSIDriverFactory()` implementation in `MainWindow.cpp` is the main entry point that is called from Simba's ODBC layer to create an instance of the DSI implementation. This method is called as soon as the Driver Manager calls `LoadLibrary()` on the ODBC connector.

To construct the connector singleton:

1. Launch Microsoft Visual Studio 2022.
2. Click **File > Open > Project/Solution**
3. Navigate to `[INSTALLDIR]\SimbaEngineSDK\10.0\Examples\Source\<YourProjectName>\Source` and then open the `<YourProjectName>_VS201x.vcproj` file.
4. Rebuild your solution and the double click the TODO #1 message section of code. The `Main_Windows.cpp` file opens.
5. Look at the `DSIDriverFactory()` implementation.
6. Specify the location that is used when reading driver settings from the registry. This change is related to rebranding. Replace "Simba" with your company name and change "Quickstart" to the name of your driver in the following line:
`SimbaSettingReader::SetConfigurationBranding("Simba\Quickstart");`
This step, like those in day one, is important to distinguish your driver from our sample and other drivers.
7. Add the processing, if you are building a commercial connector.
8. Click **Save**.

On Linux and UNIX platforms, `DSIDriverFactory()` is implemented in `Main_Unix.cpp`.

Setting Driver Properties

TODO #2: Set the driver properties.

To set driver properties:

1. Double click the TODO #2 message to jump to the relevant section of code. The `QSDriver.cpp` file opens. Look at `SetDriverPropertyValues()` where you will set up the general properties for your driver.
2. Change the `DSI_DRIVER_DRIVER_NAME` setting. Set this to the name of your driver. (The same name you used to replace "QuickstartDSII" in Day One).
3. Depending on the character sets or Unicode encoding used on your data store, you may want to change the following settings:
 - `DSI_DRIVER_STRING_DATA_ENCODING` – The encoding of char data within the data store. The default value is `ENC_UTF8`.
 - `DSI_DRIVER_WIDE_STRING_DATA_ENCODING` – The encoding of wide character data within the data store. The default is `ENC_UTF16_LE`.

Setting Logging Details

Here you will customize how the driver logs errors and other information. The important loggers are the driver log for anything not specific to a single connection, and the connection log for anything unique to a single connection or statement within a connection. Following the TODOs below, you can use our provided logger implementation and just rename the output filename. Or you may entirely replace it later with your own implementation of our `ILogger` interface.

TODO #3: Set the driver-wide logging details.

TODO #4: Set the connection-wide logging details.

To set logging details:

1. Double click the TODO #3 message to jump to the relevant section of code.
2. Change the driver log's file name.
3. Double click the TODO #4 message to jump to the relevant section of code.
4. Change the connection log's file name.
5. Click **Save All**.

By default, the SimbaEngine Quickstart Driver maintains two kinds of log files: one for all driver-based calls and one for each connection created. Update these TODO's if you do not require such fine granularity in logging.

For more information about how to enable logging, refer to the *SimbaEngine Developer Guide*.

Checking Connection Settings

TODO #5: Check Connection Settings.

When the Simba ODBC layer is given a connection string from an ODBC-enabled application, the Simba ODBC layer parses the connection string into key-value pairs. Then, the entries in the connection string and the DSN are sent to the `QSConnection::UpdateConnectionSettings()` function for validation. Validating the correctness (eg. Passwords) is done later in the `Connect()` method.

To verify connection settings:

1. Double click the TODO #5 message to jump to the relevant section of code.
2. The `UpdateConnectionSettings()` function should validate that the key-value pairs in `in_connectionSettings` are sufficient to create a connection. Use the `VerifyRequiredSetting()` or `VerifyOptionalSetting()` utility functions to do this. If any of the values received are invalid, then you should throw an `ErrorException` seeded with `DIAG_INVALID_AUTH_SPEC`.

For example, the Quickstart driver verifies that the entries within `in_connectionSettings` are sufficient to create a connection by using the following code:

```
VerifyRequiredSetting(QS_DBF_KEY, in_connectionSettings, out_connectionSettings);
```

The Quickstart driver requires a single key in the DSN, "DBF" which represents the file location to be searched. This "QS_DBF_KEY" is the connection key to use when looking up the DBF path in the connection string.

If the entries within `in_connectionSettings` are not sufficient to create a connection, then you can ask for additional information from the ODBC-enabled application by specifying the additional, required settings to `out_connectionSettings`. If there are no further entries required, simply leave `out_connectionSettings` empty.

Establishing a Connection

TODO #6: Establish A Connection.

Once `QSConnection::UpdateConnectionSettings()` returns `out_connectionSettings` without any required settings. If there are only optional settings, a connection can still occur, then the Simba ODBC layer calls `QSConnection::Connect()` passing in all the connection settings received from the application.

To establish a connection:

Double click the TODO #6 message to jump to the relevant section of code.
Look at the code that authenticates the user against your data store using the

information provided within the `in_connectionSettings` parameter. The sample code uses the utility functions `GetRequiredSetting()` and `GetOptionalSetting()`. Alternatively, if authentication fails, you can choose to throw an `ErrorException` seeded with `DIAG_INVALID_AUTH_SPEC`. Use the obtained values (eg. hostname, username, password, etc.) to make a connection with your datasource by passing them to your relevant API or network protocol.

You have now authenticated the user against your data store.

Day Three

Today's goal is to return the data used to pass catalog information back to the ODBC-enabled application. Almost all ODBC-enabled applications require the following ODBC catalog functions:

- `SQLGetTypeInfo`
- `SQLTables (CATALOG_ONLY)`
- `SQLTables (TABLE_TYPE_ONLY)`
- `SQLTables`
- `SQLColumns`

Creating and Return Metadata Sources

TODO #7: Create and return your Metadata Sources.

`QSDatabaseEngine::MakeNewMetadataTable()` is responsible for creating the sources to be used to return data to the ODBC-enabled application for the various ODBC catalog functions. Each ODBC catalog function is mapped to a unique `DSIMetadataTableId`, which is then mapped to an underlying `MetadataSource` that you will implement and return. Each `MetadataSource` instance is responsible for three things:

1. Creating a data structure that holds the data relevant for your data store: `Constructor`.
2. Navigating the structure on a row-by-row basis: `Move()`.
3. Retrieving data: `GetData()` (See Data Retrieval, Data Retrieval for a brief overview of data retrieval).

Handling DSI_TYPE_INFO_METADATA

`SQLGetTypeInfo` is used by applications to discover data types supported by your driver. The SDK supports all the types listed below but you may want to modify this metadata source if your tables don't support storing all of them or if some of the default metadata differs from our defaults.

The underlying ODBC catalog function `SQLGetTypeInfo` is handled as follows:

1. When called with `DSI_TYPE_INFO_METADATA`, `QSDatabaseEngine::MakeNewMetadataTable()` will return an instance of `QSTypeInfoMetadataSource()`.
2. The SimbaEngine Quickstart Driver example exposes support for all data types, but due to its underlying file format, it is constrained to support only the following types:

SQL_BIGINT	SQL_BIT	SQL_CHAR
SQL_DECIMAL	SQL_DOUBLE	SQL_INTEGER
SQL_LONGVARCHAR	SQL_LONGWVARCHAR	SQL_NUMERIC
SQL_REAL	SQL_SMALLINT	SQL_TINYINT
SQL_TYPE_DATE	SQL_TYPE_TIME	SQL_TYPE_TIMESTAMP
SQL_VARCHAR	SQL_WCHAR	SQL_WVARCHAR

3. For your driver, you may need to change the types returned and the parameters for the types in `QSTypeInfoMetadataSource::PrepareType()`. You change the passed in `QSTypeInfo` object to modify the parameters of the types that are supported.

Handling the other MetadataSources

The other required ODBC catalog functions (including `SQLTables (CATALOG_ONLY)`, `SQLTables (TABLE_TYPE_ONLY)`, `SQLTables (SCHEMA_ONLY)`, `SQLTables` and `SQLColumns`) are used by applications to learn about your table structure (ie, their names and contents). These sources are handled as follows:

1. When called with any other `DSIMetadataTableId`, `QSDatabaseEngine::MakeNewMetadataTable()` should return `NULL`. Returning `NULL` will signal `SimbaEngine` that it should use the metadata helper class returned via `QSDatabaseEngine::CreateMetadataHelper()` along with some default `MetadataSources` to create the data source metadata. You can also choose to return a `DSIMetadataSource` if you don't want to use the metadata helper.
2. You will need to change:
 - `QSMetadataHelper::QSMetadataHelper()`
The example constructor retrieves a list of the tables in the data source. You should modify this method to load the tables defined within your data store.
 - `QSMetadataHelper::GetNextTable()`
In the `SimbaEngine Quickstart Driver`, this method returns the next table in the data source. You should modify this method to retrieve the next table from your data store.
 - The `DSIExtMetadataHelper` class works by retrieving the identifying information for each table and then opening the table via `QSDatabaseEngine::OpenTable()`. Once you have implemented `QSTable`, the correct metadata will be returned for all of the tables and columns in your data source.

You can now retrieve type metadata from within your data store.

On Linux and UNIX platforms, this metadata is also available using the `datatypes` command in the `iodbctest` utility.

Day Four

Today's goal is to enable data retrieval from within the driver. We will discuss:

- Opening a table defined within your data store
- Retrieving the column information for the table
- Retrieving data

Enabling Data Retrieval

TODO #8: Open A Table.

`QSDatabase::OpenTable()` is the entry point where Simba SQL Engine requests that tables involved in the query be opened.

`QSTable` is an implementation of `DSIExtSimpleResultSet`, an abstract class provided by Simba that provides for basic forward-only result set traversal. The main role of `QSTable` is to translate the stored data from your native data format into SQL Data types.

The Quickstart sample driver is implemented for Tabbed Unicode Files. The sample driver translates the text from UTF16-LE strings into the SQL Data types defined for each column within the configuration dialog.

In the Quickstart driver, `QSTable` uses a `TabbedUnicodeFileReader`, which provides an interface to navigate between lines within a Unicode text file. This class preprocesses each row in the file to determine the starting file offset of each column in the row. Its `GetData` method takes a `columnIndex` and uses it to calculate the exact position in the file where the column's data resides. The method repositions the file and retrieves the data as if from a byte-buffer. See *Appendix C: Data Retrieval* for a brief overview of data retrieval.

To enable data retrieval:

1. Modify the `QSDatabase::OpenTable` method to check that the supplied catalog, schema and table names are valid and correspond to a table defined in your data store. If they are not, you should return null to indicate that the table does not exist. If the inputs are valid, then a new instance of `QSTable` is returned.
2. Make the following changes to `QSTable` for it to work with your data store:
 - a. To return the catalog, schema and table names for your table:
 - `QSTable::QSTable()`: The constructor must be modified to take in the catalog, schema and table names and save them in member variables.
 - `QSTable::GetCatalogName()`: Returns `QS_CATALOG`;
 - `QSTable::GetSchemaName()`: Returns `simba_wstring()` (because it does not

```
support schemas);
```

- `QSTable::GetTableName():` Returns `m_tableName`;

b. To return the columns defined for your table:

- `QSTable::InitializeColumns():` Modify the method so that, for each column defined in the table, you define a `DSIResultSetColumn` in terms of SQL types. Here is an example of pseudo code for the new method:

- `AutoPtr<DSIResultSetColumns> columns;`

Get all column information from your data store for the table

For Each Defined Column

```
{
    AutoPtr<DSIColumnMetadata> columnMetadata(
        new DSIColumnMetadata());
    columnMetadata->m_catalogName = m_catalogName;
    columnMetadata->m_schemaName = m_schemaName;
    columnMetadata->m_tableName = m_tableName;
    columnMetadata->m_name = //column name
    columnMetadata->m_label = //localized column name
    columnMetadata->m_unnamed = false;
    columnMetadata->m_charOrBinarySize = //the length in
    bytes
    columnMetadata->m_nullable = DSI_NULLABLE;
    // Change the first parameter of this method to the SQL
    // type that maps to your data store type.
    SqlTypeMetadata* sqlTypeMetadata =
    SqlTypeMetadataFactory::MakeNewSqlTypeMetadata(
        SQL_WVARCHAR, TDW_BUFFER_OWNED);
    columns->AddColumn(
        new DSIResultSetColumn(
            sqlTypeMetadata,
            columnMetadata.Detach()));
}
```

```
}
```

```
m_columns.Attach(columns.Detach());
```

- c. Modify the following three methods. The methods are responsible for navigating a data structure containing information about one table in the data store and retrieving data from the table:

- `QSTable::MoveToBeforeFirstRow()`
- `QSTable::MoveToNextRow()`
- `QSTable::GetData()`

In your class:

- Implementing a streaming interface for the data in the table within your data store is best.
 - Provide the ability to navigate forward from one table row to the next.
 - Provide the ability to navigate across columns within the row.
 - Provide the ability to read the data associated with the current row and column combination.
- d. Modify `QSTable::DoCloseCursor()`. This is a callback method called from Simba SQL Engine to indicate that data retrieval has completed and that you may now do any tasks related to closing the connection to your data store.

You can now retrieve data and see the rest of the metadata from your data store. You should be able to:

- Run `SQLTables()` and `SQLColumns()` from within `ODBCTest32.exe` (Unicode) and see the correct metadata returned.
- Execute queries from any ODBC-enabled application such as Microsoft Excel, Microsoft Access, Microsoft SQL Server or Crystal Reports and see the results returned from your data store.

On Linux and UNIX platforms, lists of catalogs, schemas, tables and types are available using the `qualifiers`, `owners`, `tables` and `types` commands in the `iodbctest` utility.

Day Five

Today's goal is to start productizing your driver. Additionally, you can also start localizing your driver error messages. Refer to SimbaEngine Developer Guide for more details.

Configuring Error Messages

TODO #9: Register Messages xml file for handling by DSIMessageSource.

All the error messages used within your DSI implementation are stored in a file called `QSMessages.xml`

To configure error messages:

1. Rename the `QSMessages.xml` file to something appropriate to your data store.
2. Double click the TODO #9 message to jump to the relevant section of code.
3. Update the line associated with the TODO to match the new name of the file.
4. Open the `QSMessages.xml` file and change all instances of the following items:
 - The letters "QS" to a two letter abbreviation of your choice
 - The word "Quickstart" to a name relating to your driver
5. When you are done, you should revisit each exception thrown within your DSI implementation and change the parameters to match as well. This will rebrand your converted SimbaEngine Quickstart Driver for your organization.

TODO #10: Set the vendor name, which will be prepended to error messages.

The vendor name is prepended to all error messages that are visible to applications. The default vendor name is Simba.

To set the vendor name:

1. Double click the TODO #10 message to jump to the relevant section of code.
2. Set the vendor name as shown in the commented code.

Adding Finishing Touches

You have now completed all TODO's in the project. However, there are still a couple of final steps before you have a fully functioning driver.

To add finishing touches:

1. Rename all files and classes in the project to have the two-letter abbreviation you chose as part of TODO #9.

2. Create a driver configuration dialog. This dialog is presented to the user when they use the ODBC Data Source Administrator to create a new ODBC DSN or configure an existing one. The C++ SimbaEngine Quickstart Driver project contains an example ODBC configuration dialog that you can look at, as an example. You can find the source under the Setup folder within the SimbaEngine Quickstart Driver project.
3. To see the driver configuration dialog that you created, run the ODBC Data Source Administrator, open the Control Panel, select Administrative Tools, and then select Data Sources (ODBC). If your Control Panel is set to view by category, then Administrative Tools is located under System and Security.



Important: If you are using 64-bit Windows with 32-bit applications, you must use the 32-bit ODBC Data Source Administrator. You cannot access the 32-bit ODBC Data Source Administrator from the start menu or control panel in 64-bit Windows. Only the 64-bit ODBC Data Source Administrator is accessible from the start menu or control panel. On 64-bit Windows, to launch the 32-bit ODBC Data Source Administrator you must run

`C:\WINDOWS\SysWOW64\odbcad32.exe`. See ODBC Data Source Administrator on Windows 32-Bit vs. 64-Bit ODBC Data Source Administrator on Windows 32-Bit vs. 64-Bit on page 1 for details.

On Linux and UNIX platforms, creating a driver configuration dialog is possible. However, the Quickstart sample driver for Linux and UNIX platforms does not include a configuration dialog.

Conclusion

By modifying the Quickstart sample driver included with SimbaEngine, you have created your own read-only ODBC driver that connects to your data store.

Reference

This section contains more information that you may find useful when developing your sample ODBC driver.

Appendix A: ODBC Data Source Administrator on Windows 32-Bit vs. 64-Bit

On a 64-bit Windows system, you can execute 64-bit and 32-bit applications transparently. Currently, many applications are available in 32-bit versions only. Running 32-bit applications on 64-bit operating systems is common.

Note: Microsoft Excel is available in 32-bit and 64-bit versions.

In a single running process, all of the code must be either 64-bit or 32-bit. 64-bit applications can only load 64-bit ODBC drivers and 32-bit applications can only load 32-bit ODBC drivers.

On a 64-bit Windows system, the ODBC Data Source Administrator that you access through the Control Panel by default configures data sources for 64-bit applications. However, you must use the 32-bit version of the ODBC Data Source Administrator to configure data sources for 32-bit applications.

PROBLEM: You cannot access the 32-bit ODBC Data Source Administrator from the Start menu or Control Panel in 64-bit Windows.

SOLUTION: To create new 32-bit data sources or modify existing ones on 64-bit Windows you must run `C:\WINDOWS\SysWOW64\odbcad32.exe`. Create a shortcut to the 32-bit ODBC Data Source Administrator on your Desktop or Start menu if you configure 32-bit data sources frequently.

Appendix B: Bitness and the Windows Registry

A 64-bit application cannot use a 32-bit ODBC driver, and vice versa. In the Registry on computers running 64-bit Windows operating systems, system-wide information about 64-bit ODBC drivers is stored in the `HKEY_LOCAL_MACHINE\SOFTWARE\ODBC` subkey and system-wide information about 32-bit ODBC drivers is stored in the `HKEY_LOCAL_MACHINE\SOFTWARE\WOW6432NODE\ODBC` subkey.

For 32-bit applications running on a 64-bit computer, 32-bit data sources appear the same as if the application was running on a 32-bit computer.

On computers running 32-bit Windows operating systems, system-wide information about ODBC drivers is stored in the `HKEY_LOCAL_MACHINE\SOFTWARE\ODBC` subkey. 32-bit Windows operating systems cannot run 64-bit applications or drivers.

32- and 64-bit ODBC Data Source Administrators discussed in "Appendix A: ODBC Data Source Administrator on Windows 32-Bit vs. 64-Bit" above use information about drivers stored in the respective Windows Registry keys.

The ODBCINST.INI Subkey

To define a name and set the location of drivers, the ODBC Data Source Administrator matching the bitness of the operating system uses definitions in the subkey HKEY_LOCAL_MACHINE/SOFTWARE/ODBC/ODBCINST.INI and the 32-bit ODBC Data Source Administrator on 64-bit Windows uses Registry keys created in HKEY_LOCAL_MACHINE/SOFTWARE/WOW6432NODE/ODBC/ODBCINST.INI

The ODBCINST.INI subkey contains a subkey for each driver. The subkey for each driver includes the following string values:

- **Driver** provides the path to the driver DLL
- **Setup** provides the location of the driver setup DLL
- **Description** briefly describes the driver

The ODBCINST.INI subkey also contains a subkey named ODBC Drivers that contains string values to match the name of each driver subkey. Each string value is the text Installed

For more details on information in the Windows Registry contained in the ODBCINST.INI subkey, see the MSDN topic Registry Entries for ODBC Components at <https://msdn.microsoft.com/en-us/library/ms714818%28v=vs.85%29.aspx>.

The ODBC.INI Subkey

To connect a driver to a database, the ODBC Data Source Administrator matching the bitness of the operating system uses definitions in the subkey HKEY_LOCAL_MACHINE/SOFTWARE/ ODBC/ODBC.INI and the 32-bit ODBC Data Source Administrator on 64-bit Windows uses Registry keys created in HKEY_LOCAL_MACHINE/SOFTWARE/WOW6432NODE/ODBC/ ODBC.INI

The ODBC.INI subkey contains a subkey for each Data Source Name (DSN). The subkey for each DSN includes the following string values:

- **Driver** defines the name of the driver to use for connecting to the database, as set in the ODBCINST.INI subkey.

The Driver value can also set a file path to the driver DLL.

- **DBF** defines the path to the database to which the DSN creates a connection.
- **Description** briefly describes the DSN.

The ODBC.INI subkey also contains a subkey named ODBC Data Sources that contains string values to match the name of each DSN subkey. Each string value is the name of the driver that the DSN uses.

For more details on information in the Windows Registry contained in the ODBC.INI subkey, see the MSDN topic Registry Entries for Data Sources at <https://msdn.microsoft.com/en-us/library/ms712603%28v=vs.85%29.aspx>.

Appendix C: Data Retrieval

In the Data Store Interface (DSI), the following two methods actually perform the task of retrieving data from your data store:

- Each `MetadataSource` implementation of `GetMetadata()`
- `QSTable::GetData()`

Both methods will provide a way to uniquely identify a column within the current row. For `MetadataSource`, Simba SQL Engine will pass in a unique column tag (see `DSIOutputMetadataColumnTag`). For `QSTable`, Simba SQL Engine will pass in the column index.

In addition, both methods accept the following three parameters:

1. `in_data`

The `SQLData` into which you must copy the value of your cell. This class is a wrapper around a buffer managed by the Simba SQL Engine. To access the buffer, you call its `GetBuffer()` method. The data you copy into the buffer must be formatted as a SQL Type (see <http://msdn.microsoft.com/en-us/library/ms710150%28VS.85%29.aspx> for a list of data types and definitions). Therefore, if your data is not stored as SQL Types, you will need to write code to convert from your native format.

The type of this parameter is governed by the metadata for the column that is returned by the class. Thus, if you set the SQL Type of column 1 in `QSTable::InitializeColumns()` to `SQL_INTEGER`, then when `QSTable::GetData()` is called for column 1, you will be passed a `SQLData` that wraps an `int` datatype. For `MetadataSource`, the type is associated with the column tag (see `DSIOutputMetadataColumnTag.h`). For character or binary data you must call `SetLength()` before calling `GetBuffer()`. Not doing so may result in a heap-violation. See `QSTypeUtilities.h` for an example on how to handle character or binary data.

2. `in_offset`

Character, wide character and binary data types can be retrieved in parts. This value specifies where, in the current column, the value should be copied from. The value is usually 0.

3. `in_maxSize`

The maximum size (in bytes) that can be copied into the `in_data` parameter. For character or binary data, copying data that is greater than this size can result in a data truncation warning or a heap-violation.

SqlData types

`SQLData` objects represent the SQL types and encapsulate the data in a buffer. When you have a `SQLData` object and would like to know what data type it is representing, use `GetMetadata()->GetSqlType()` to see what the associated `SQL_*` type is.

For information how SQL types map to C++ types, see Appendix G in the *SimbaEngine Developer Guide*.

Fixed length types

The structures used to store the fixed-length data types represented by `SqlData` objects are:

`SQL_BIT`

`SQL_DATE`

`SQL_DECIMAL`

`SQL_DOUBLE`

`SQL_FLOAT`

`SQL_INTERVAL_DAY`

`SQL_INTERVAL_DAY_TO_HOUR`

`SQL_INTERVAL_DAY_TO_MINUTE`

`SQL_INTERVAL_DAY_TO_SECOND`

`SQL_INTERVAL_HOUR`

`SQL_INTERVAL_HOUR_TO_MINUTE`

`SQL_INTERVAL_HOUR_TO_SECOND`

`SQL_INTERVAL_MINUTE`

`SQL_INTERVAL_MINUTE_TO_SECOND`

`SQL_INTERVAL_MONTH`

`SQL_INTERVAL_SECOND`

`SQL_INTERVAL_YEAR`

`SQL_INTERVAL_YEAR_TO_MONTH`

`SQL_NUMERIC`

`SQL_REAL`

`SQL_BIGINT`

`SQL_INTEGER`

`SQL_SMALLINT`

`SQL_TINYINT`

`SQL_TYPE_DATE`

`SQL_TYPE_TIME`

`SQL_TYPE_TIMESTAMP`

More information on Date, Time and DateTime types

The associated SQL types for date, time, and datetime are `SQL_TYPE_DATE`, `SQL_TYPE_TIME`, and `SQL_TYPE_TIMESTAMP`. Please note that the `SQL_TIME`, `SQL_DATE`, and `SQL_TIMESTAMP` are ODBC 2.x types while the `SQL_TYPE_*` types are ODBC 3.x types, so you should be sure to use the `SQL_TYPE_*` types since you are developing an ODBC 3.x driver.

Simple Fixed-Length Data Example

For a `SQL_INTEGER`, the `SQLData` will contain a `simba_int32` which you must copy your integer value into. The example below illustrates how this might be achieved.

```
switch (in_data->GetMetadata()->GetSqlType())
{
    case SQL_INTEGER:
    {
        simba_int32 value = 1234;
        *reinterpret_cast<simba_int32*>(in_data->GetBuffer()) = value;
    }
}
```

Variable Length Types

The following variable-length data types are stored in buffers and represented by `SqlData` objects:

```
SQL_BINARY
SQL_CHAR
SQL_LONGVARBINARY
SQL_LONGVARCHAR
SQL_VARBINARY
SQL_VARCHAR
SQL_WCHAR
SQL_WLONGVARCHAR
SQL_WVARCHAR
```

You may find that the `DSITypeUtilities::OutputWVarCharStringData` and `OutputVarCharStringData` are useful for setting character data.

Simple Variable-Length Data Example

The `SQL_CHAR` example below illustrates how the type utilities might be used while the `SQL_VARCHAR` example shows a simple example using `memcpy`. In practise, `SQL_CHAR`, `SQL_`

`VARCHAR` and `SQL_LONGVARCHAR` will not need separate cases to handle them and there will also be other considerations such as having to deal with offsets into the data.

```
switch (in_data->GetMetadata()->GetSqlType())
{
    case SQL_CHAR:
    {
        simba_string stdString("Hello");
        return DSITypeUtilities::OutputVarCharStringData(
            &stdString,
            in_data,
            in_offset,
            in_maxSize);
    }
    case SQL_VARCHAR:
    {
        simba_string stdString("Hello");
        simba_uint32 size = stdString.size();
        in_data->SetLength(size);
        memcpy(in_data->GetBuffer(), stdString, size);
    }
}
return false;
}
```

Data Conversion in Practice

In the SimbaEngine Quickstart example, when `GetData()` is called the values are read from the tabbed Unicode file (in `TabbedUnicodeFileReader::GetData()`), converted to `simba_wstrings` (in `QSTable::ReadWholeColumnAsString()`) and then converted to the requested SQL data type (in `QSTable::ConvertData()`). This works well because the data source is a text file and a good cross-platform example.

For your data source, if you're already getting data of the correct type—integers, for example—then ideally you should skip the conversion to strings so you can achieve better performance. Be aware of which data types map to which SQL Types, as well as how to represent them in the expected format. Then you can set the buffer in an appropriate manner.

NULL Values

To represent a null value, directly set the `SqlData` object as null:

```
in_data->SetNull(true);
```

Appendix D: C++ Server Configuration

To establish a connection, the connection settings for the driver are normally retrieved directly from the ODBC DSN. However, when the driver is a server, the settings cannot be retrieved directly because the DSN refers to the client instead of a specific driver. In addition, there would also be security concerns, if a given client has control over server-specific settings. Therefore, to establish a connection when a driver is a server, the connection settings need to be augmented.

The information in this section only applies if you are using 32-Bit Windows. If you are using 64-bit Windows (with either 32-bit or 64-bit applications), the file paths must be configured appropriately. Please see Windows Registry 32-Bit vs. 64-Bit Windows Registry 32-Bit vs. 64-Bit on page 1 for details.

For the UltraLight sample driver, the registry entries under `HKEY_LOCAL_MACHINE\SOFTWARE\SIMBA\ULTRALIGHT\SERVER` are used to enable this server-specific behavior. The settings augment the connection settings that are passed in during a connection.

On Linux and UNIX platforms, the configuration entries are located in the `.simbaserver.ultralight.ini` file.

To set the UltraLight sample driver up as a server, build the UltraLight solution using a server configuration (i.e. `Debug_Server` or `Release_Server`). This will build the server executable.

The rest of the server settings are located under sub-nodes of `HKEY_LOCAL_MACHINE\SOFTWARE\SIMBA\ULTRALIGHT\SERVER`. For full list of possible server configuration parameters, please see the *SimbaClientServer* User Guide.

On Linux and UNIX platforms, to set the UltraLight sample driver up as a server you need to:

1. Build UltraLight using the debug (or release) server configuration:

```
BUILDSERVER=exe make -f UltraLight.mak debug
```

2. Configure the server as required in the other sections of the

`.simbaserver.ultralight.ini` file.

For further details on setting up a connection between a client and server, please see the *SimbaClientServer* User Guide. Once you have configured the client and server, you should be able to connect to your data source.

Appendix E: C++ Server Configuration

To establish a connection, the connection settings for the driver are normally retrieved directly from the ODBC DSN. However, when the driver is a server, the settings cannot be retrieved directly because the DSN refers to the client instead of a specific driver. In addition, there would also be security concerns, if a given client has control over server-specific settings. Therefore, to establish a connection when a driver is a server, the connection settings need to be augmented.



Important: Windows Registry keys listed below apply to 32-Bit Windows and 64-bit Windows when running 64-bit applications. If you are using 64-bit Windows with 32-bit applications, then adjust the paths as described in "Appendix B: Bitness and the Windows Registry" on page 27.

For the Quickstart sample driver, the registry entries under `HKEY_LOCAL_MACHINE/SOFTWARE/SIMBA/QUICKSTART/SERVER` are used to enable this server-specific behavior. The settings augment the connection settings that are passed in during a connection.

On Linux and UNIX platforms, the configuration entries are located in the `.simbaserver.quickstart.ini` file.

To set up the Quickstart sample driver as a server:

1. Build the Quickstart solution using a server configuration (i.e. `Debug_Server` or `Release_Server`). This will build the server executable.
2. In the Windows Registry, navigate to the key `HKEY_LOCAL_MACHINE/SOFTWARE/SIMBA/QUICKSTART/SERVER`, and then add the following string value: `DBF=[INSTALL_DIRECTORY]\Examples\Databases\Quickstart`.
3. Additional server settings are located under sub-nodes of `HKEY_LOCAL_MACHINE/SOFTWARE/SIMBA/QUICKSTART/SERVER`. For full list of possible server configuration parameters, see the *SimbaClientServer* User Guide.

On Linux and UNIX platforms, to set the Quickstart sample driver up as a server you need to:

1. Build Quickstart using the debug (or release) server configuration:
`BUILDSERVER=exe make -f Quickstart.mak debug`
2. Add the DBF value to the `[Server]` section of the `.simbaserver.quickstart.ini` file:
`DBF=[INSTALL_DIRECTORY]/Examples/Databases/Text`
3. Configure the server as required in the other sections of the `.simbaserver.quickstart.ini` file.

For further details on setting up a connection between a client and server, please see the *SimbaClientServer* User Guide. After configuring the client and server, you should be able to connect to your data source.

Third Party Licenses

ICU License – ICU 1.8.1 and later

COPYRIGHT AND PERMISSION NOTICE

Copyright (c) 1995–2014 International Business Machines Corporation and others

All rights reserved.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, provided that the above copyright notice(s) and this permission notice appear in all copies of the Software and that both the above copyright notice(s) and this permission notice appear in supporting documentation.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OF THIRD PARTY RIGHTS. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR HOLDERS INCLUDED IN THIS NOTICE BE LIABLE FOR ANY CLAIM, OR ANY SPECIAL INDIRECT OR CONSEQUENTIAL DAMAGES, OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Except as contained in this notice, the name of a copyright holder shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Software without prior written authorization of the copyright holder.

All trademarks and registered trademarks mentioned herein are the property of their respective owners.

OpenSSL License

Copyright (c) 1998–2011 The OpenSSL Project. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgment:

"This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (<http://www.openssl.org/>)"

4. The names "OpenSSL Toolkit" and "OpenSSL Project" must not be used to endorse or promote products derived from this software without prior written permission. For written permission, please contact openssl-core@openssl.org.

5. Products derived from this software may not be called "OpenSSL" nor may "OpenSSL" appear in their names without prior written permission of the OpenSSL Project.

6. Redistributions of any form whatsoever must retain the following acknowledgment:

"This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (<http://www.openssl.org/>)"

THIS SOFTWARE IS PROVIDED BY THE OpenSSL PROJECT "AS IS" AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE OpenSSL PROJECT OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This product includes cryptographic software written by Eric Young (eay@cryptsoft.com). This product includes software written by Tim Hudson (tjh@cryptsoft.com).

Original SSLeay License

Copyright (C) 1995-1998 Eric Young (eay@cryptsoft.com)

All rights reserved.

This package is an SSL implementation written by Eric Young (eay@cryptsoft.com). The implementation was written so as to conform with Netscapes SSL.

This library is free for commercial and non-commercial use as long as the following conditions are aheared to. The following conditions apply to all code found in this distribution, be it the RC4, RSA, lhash, DES, etc., code; not just the SSL code. The SSL documentation included with this distribution is covered by the same copyright terms except that the holder is Tim Hudson (tjh@cryptsoft.com).

Copyright remains Eric Young's, and as such any Copyright notices in the code are not to be removed. If this package is used in a product, Eric Young should be given attribution as the author of the parts of the library used. This can be in the form of a textual message at program startup or in documentation (online or textual) provided with the package.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgement:

"This product includes cryptographic software written by Eric Young (eay@cryptsoft.com)"

The word 'cryptographic' can be left out if the routines from the library being used are not cryptographic related :-).

4. If you include any Windows specific code (or a derivative thereof) from the apps directory (application code) you must include an acknowledgement:

"This product includes software written by Tim Hudson (tjh@cryptsoft.com)"

THIS SOFTWARE IS PROVIDED BY ERIC YOUNG ``AS IS'' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The licence and distribution terms for any publically available version or derivative of this code cannot be changed. i.e. this code cannot simply be copied and put under another distribution licence [including the GNU Public Licence.]

Expat License

"Copyright (c) 1998, 1999, 2000 Thai Open Source Software Center Ltd

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE."

Stringencoders License

Copyright 2005, 2006, 2007

Nick Galbreath -- nickg [at] modp [dot] com

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

Neither the name of the modp.com nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This is the standard "new" BSD license:

<http://www.opensource.org/licenses/bsd-license.php>

dtoa License

The author of this software is David M. Gay.

Copyright (c) 1991, 2000, 2001 by Lucent Technologies.

Permission to use, copy, modify, and distribute this software for any purpose without fee is hereby granted, provided that this entire notice is included in all copies of any software which is or includes a copy or modification of this software and in all copies of the supporting documentation for such software.

THIS SOFTWARE IS BEING PROVIDED "AS IS", WITHOUT ANY EXPRESS OR IMPLIED WARRANTY. IN PARTICULAR, NEITHER THE AUTHOR NOR LUCENT MAKES ANY REPRESENTATION OR WARRANTY OF ANY KIND CONCERNING THE MERCHANTABILITY OF THIS SOFTWARE OR ITS FITNESS FOR ANY PARTICULAR PURPOSE.